

FIG. 1

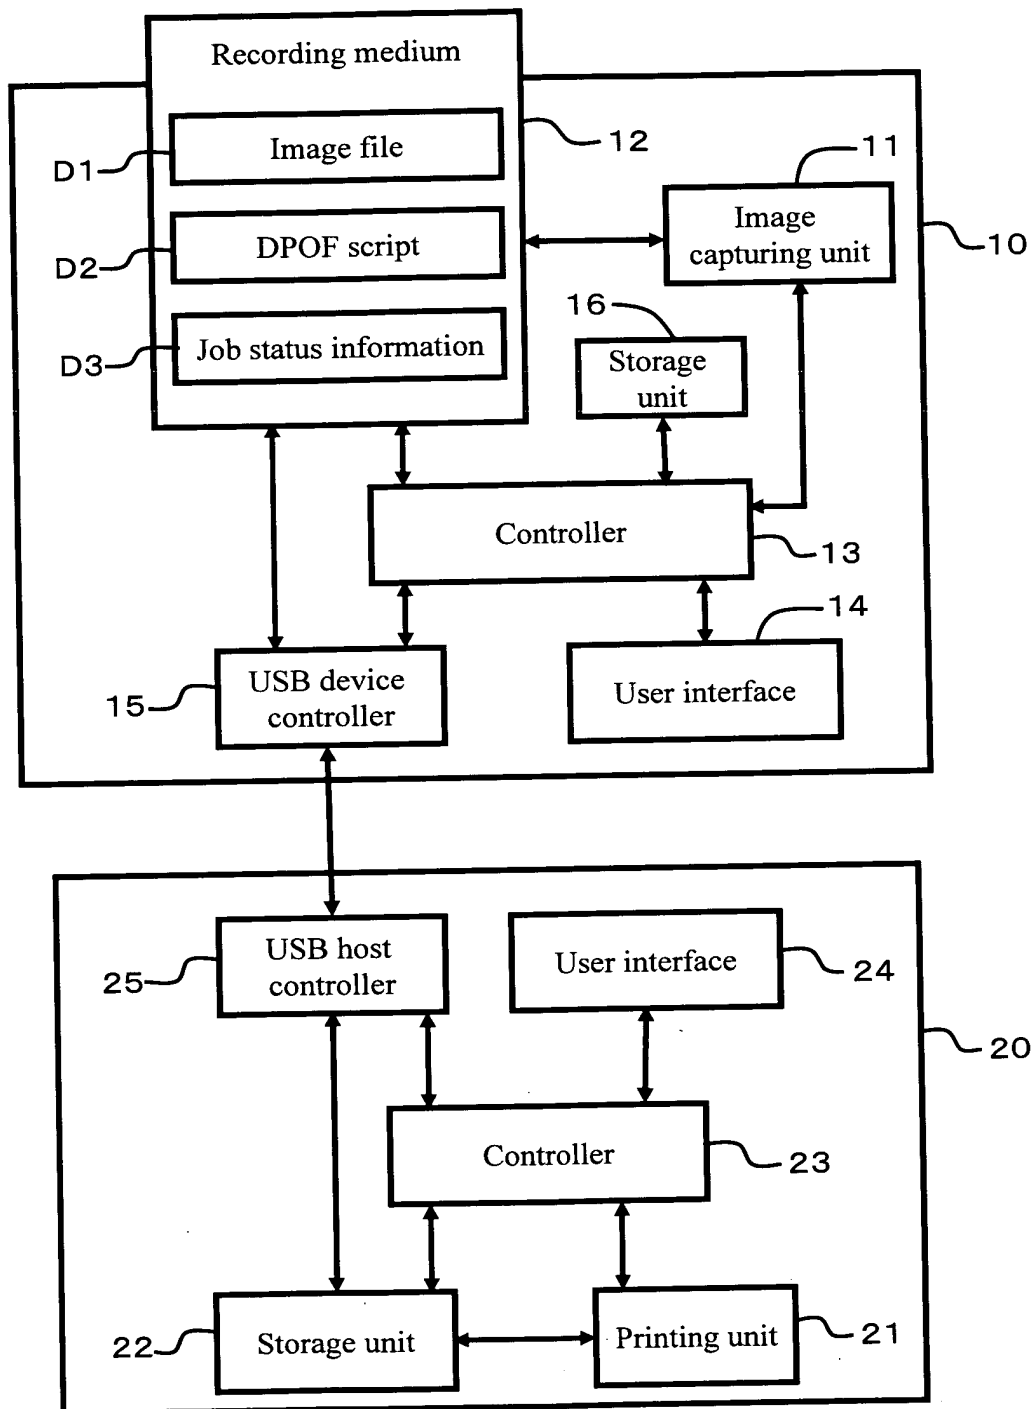


FIG. 2


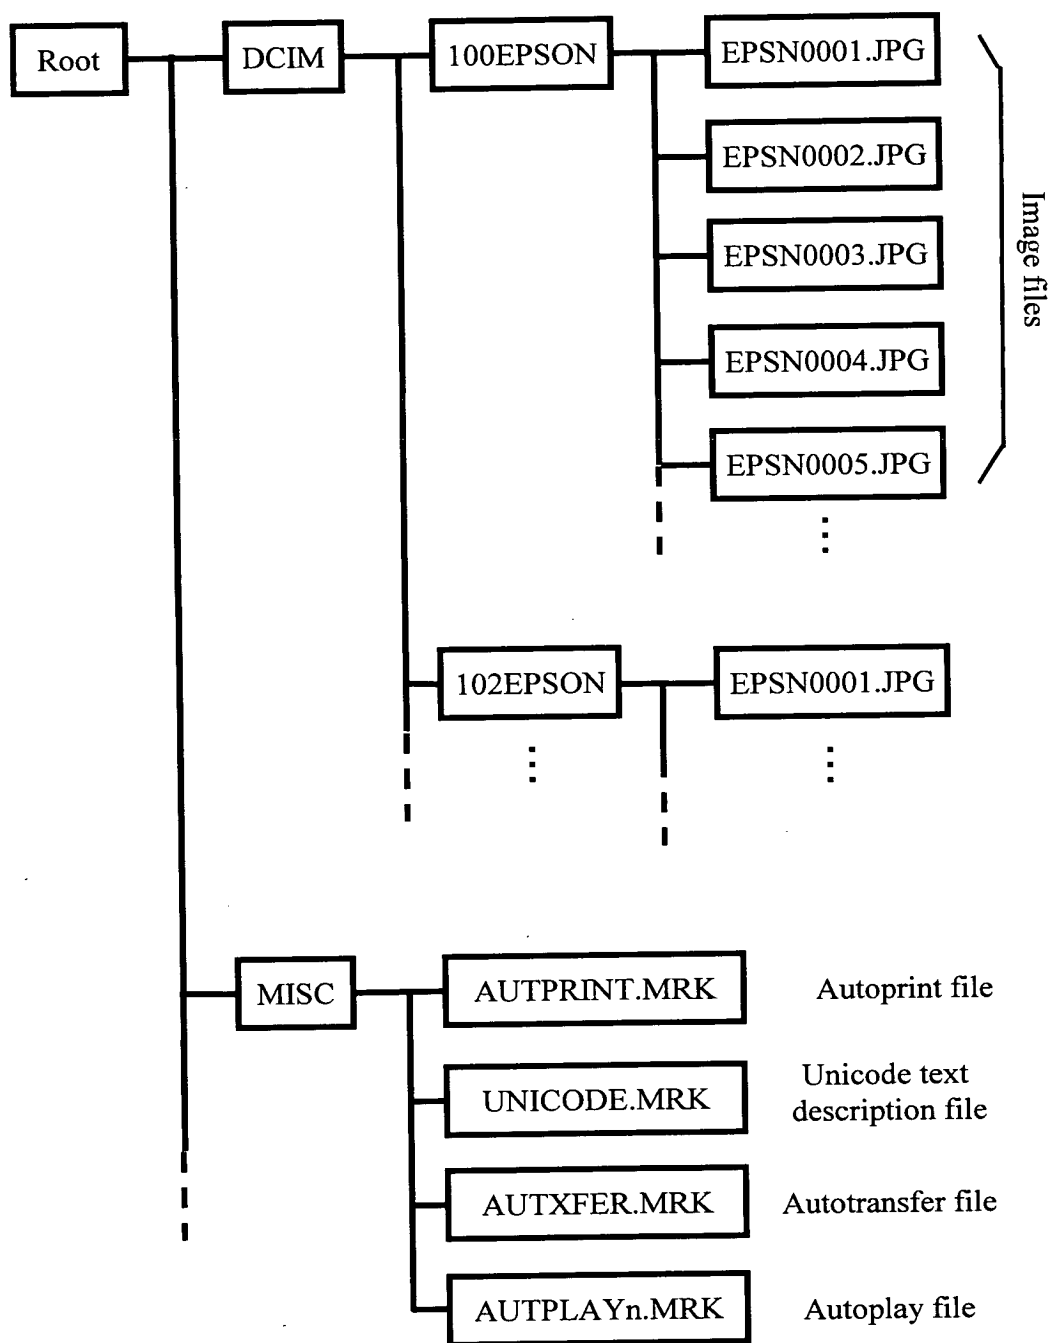


FIG. 3

(a) Specify DPOF printing

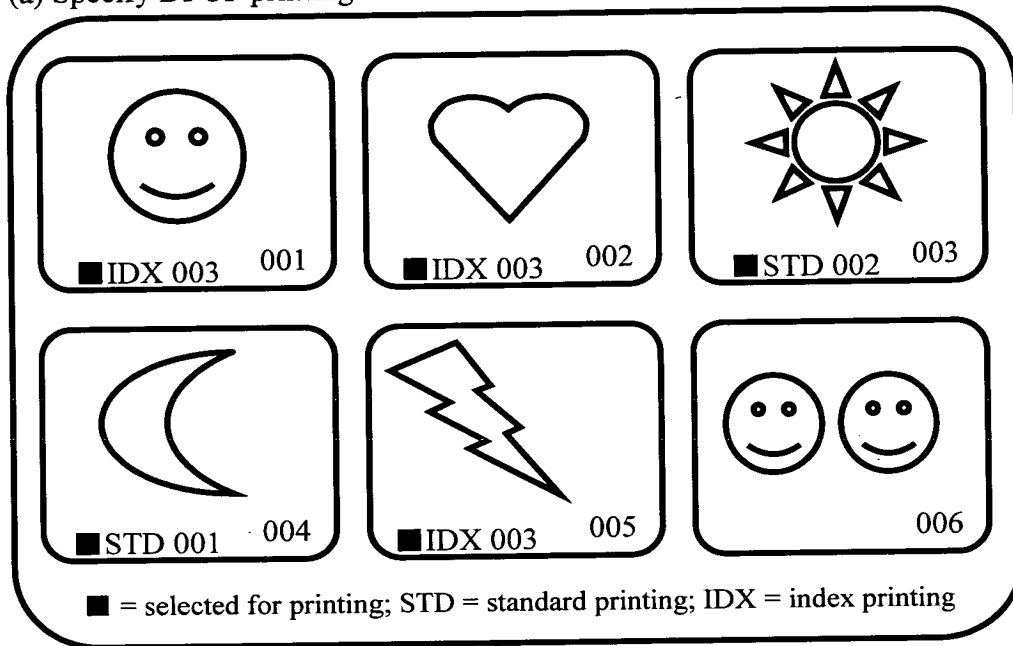

(b) DPOF script creation

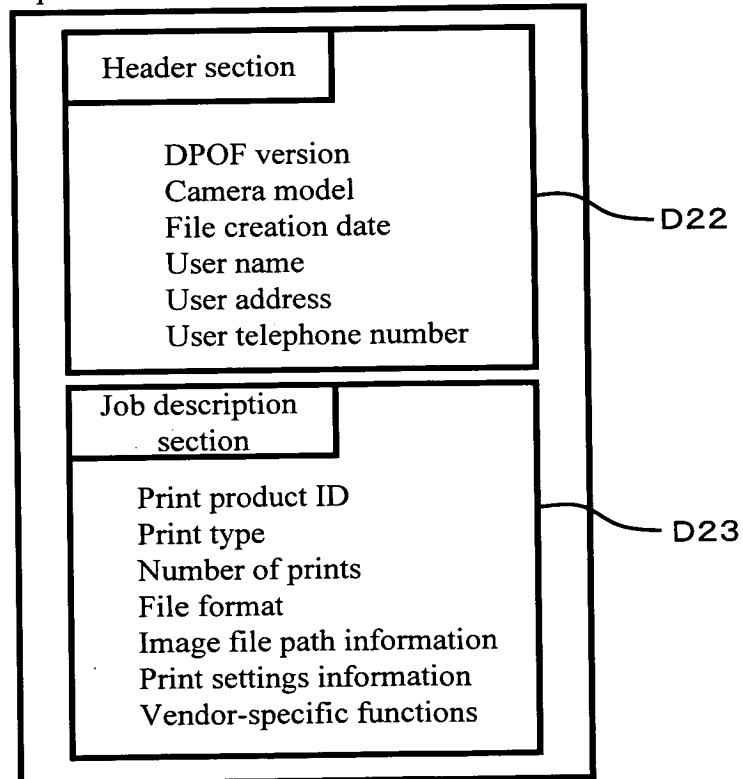


FIG. 4

(a)

[HDR]	; Header section
GEN REV=01.10	; DPOF version
GEN CRT="CP-920Z"-01.00	; Model
GEN DTM=2002:06:20:14:30:00	; File creation date
[JOB]	; Job description section
PRT PID=001	; Print product ID
PRT TYP=STD	; Print type
PRT QTY=002	; Number of prints
IMG FMT=EXIF2-J	; File format
	; File path

(b)

[HDR]	; Header section
GEN REV=01.10	; DPOF version
GEN CRT="CP-920Z"-01.00	; Model
GEN DTM=2002:06:20:14:30:00	; File creation date
[JOB]	
PRT PID=001	
PRT TYP=IDX	; Index printing
PRT QTY=003	
IMG FMT=EXIF2-J	; Exchangeable Image File Format
IMG SRC="../../DCIM/100EPSON/EPSON0001.JPG"	; For index printing,
IMG SRC="../../DCIM/100EPSON/EPSON0002.JPG"	; do not use <
▶ IMG SRC="../../DCIM/100EPSON/EPSON0003.JPG"	; with path description.
IMG SRC="../../DCIM/100EPSON/EPSON0004.JPG"	
IMG SRC="../../DCIM/100EPSON/EPSON0005.JPG"	

(c)

[HDR]	; Header section
GEN REV=01.10	; DPOF version
GEN CRT="CP-920Z"-01.00	; Model
GEN DTM=2002:06:20:14:30:00	; File creation date
[JOB]	
PRT PID=001	
PRT TYP=STD	
PRT QTY=001	
IMG FMT=EXIF2-J	
	; For standard printing,
	; use < with path.

FIG. 5

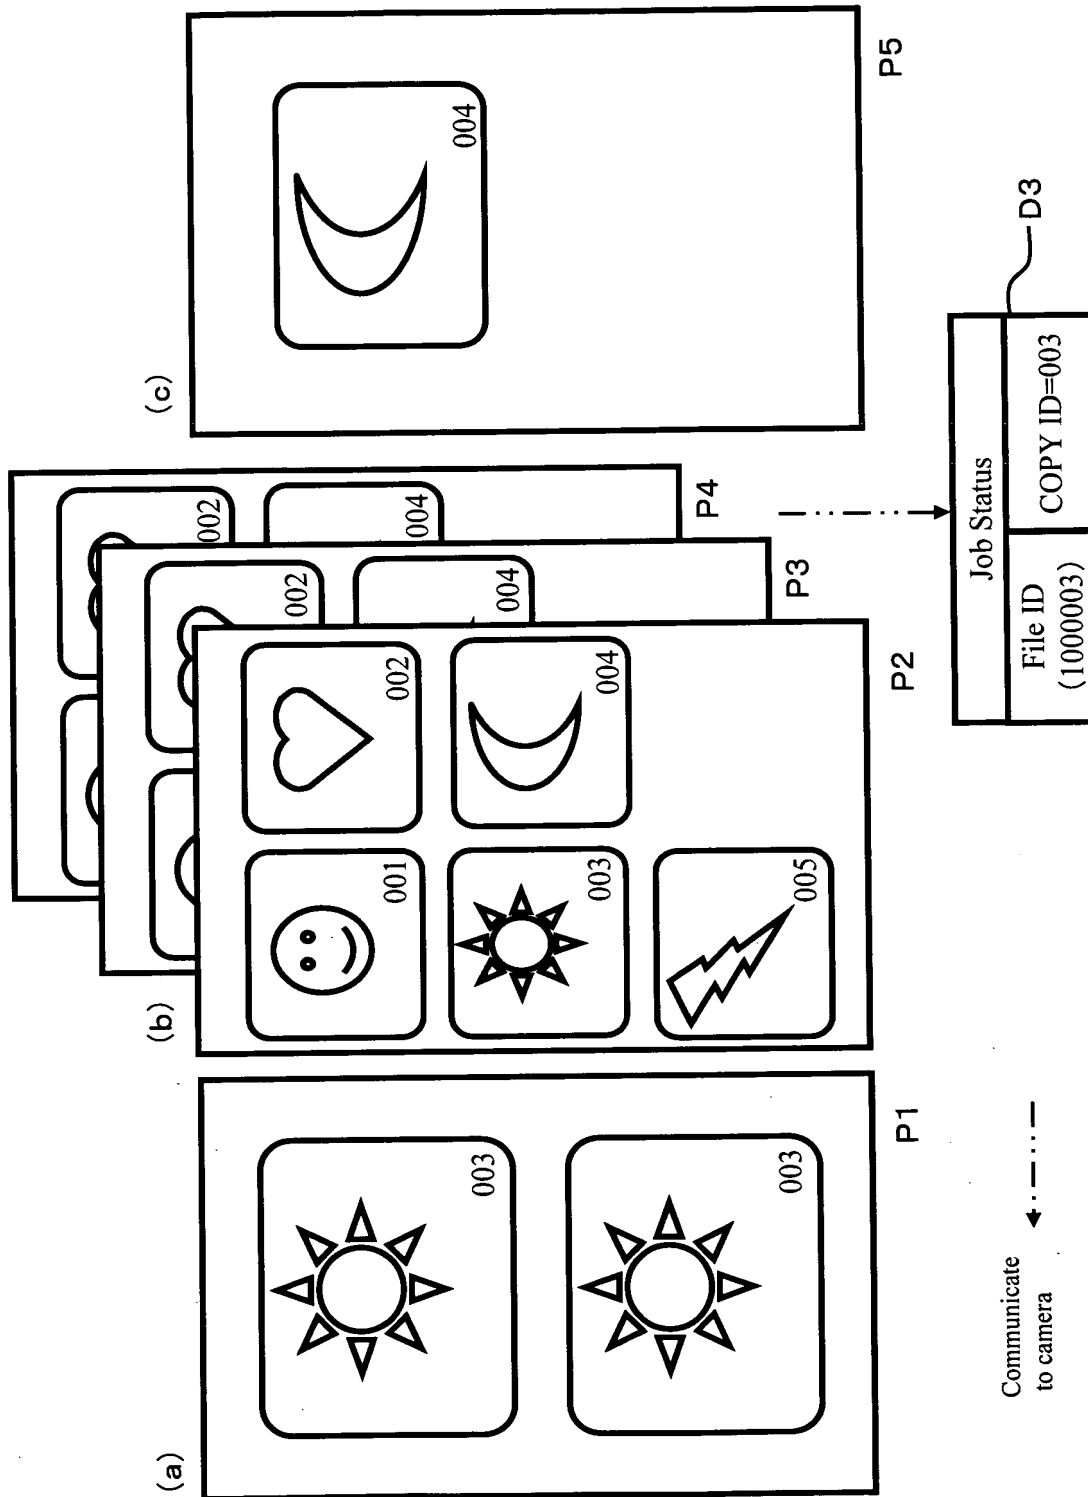


FIG. 6

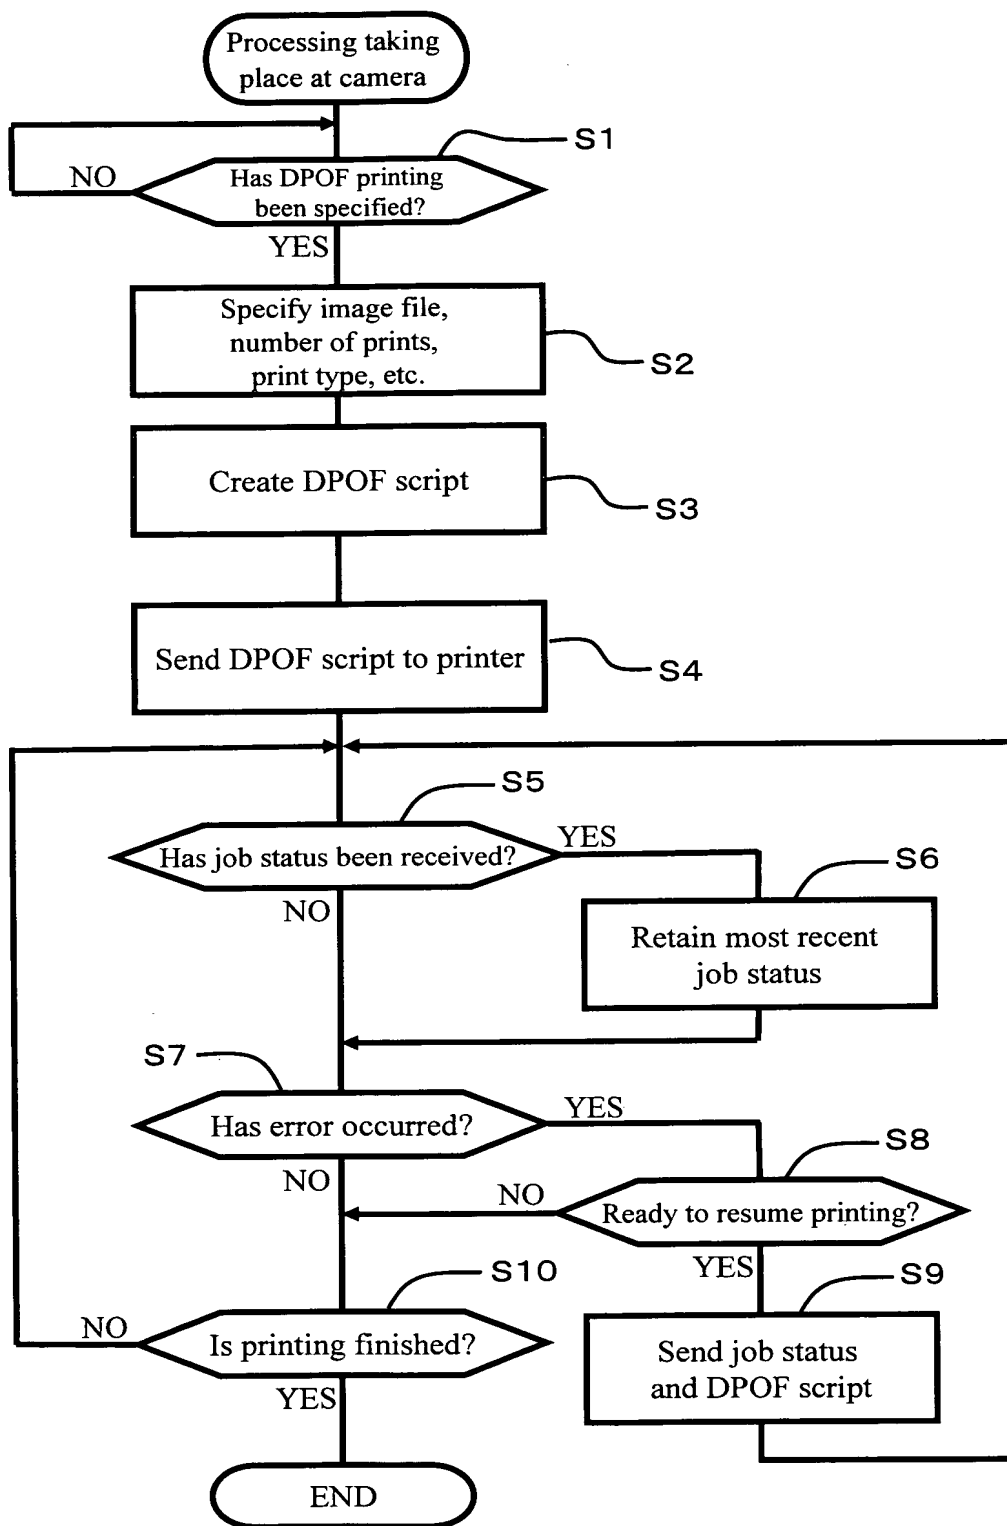


FIG. 7

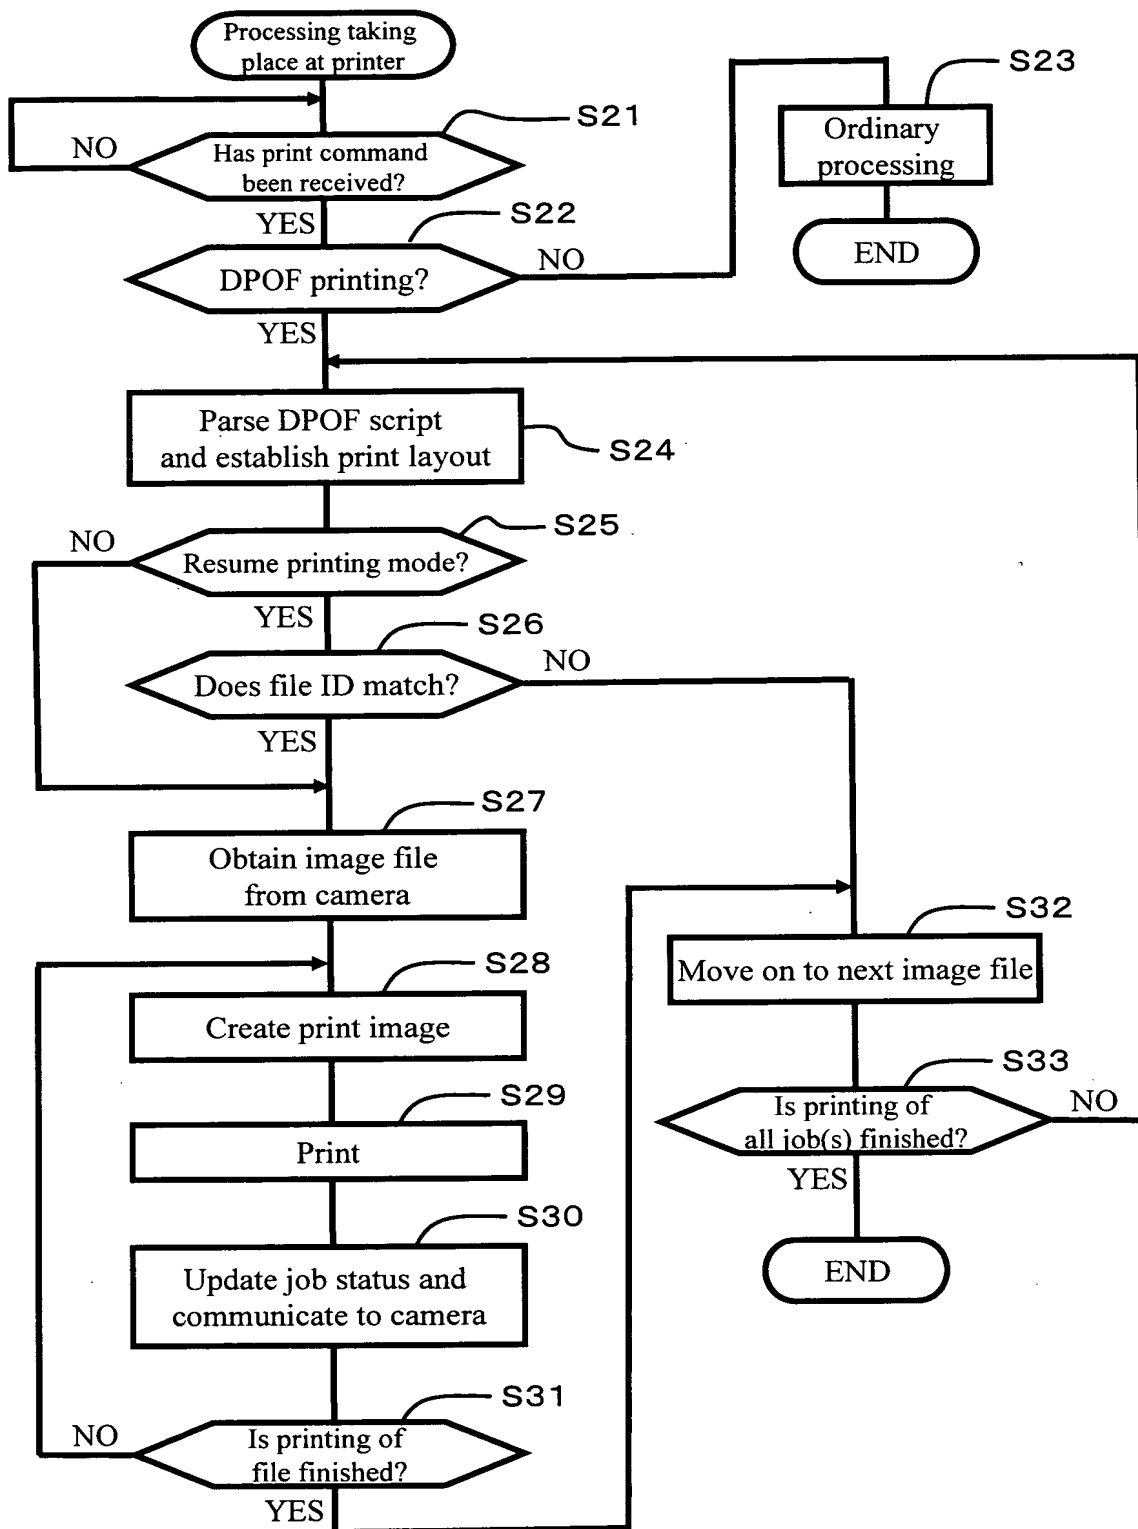


FIG. 8

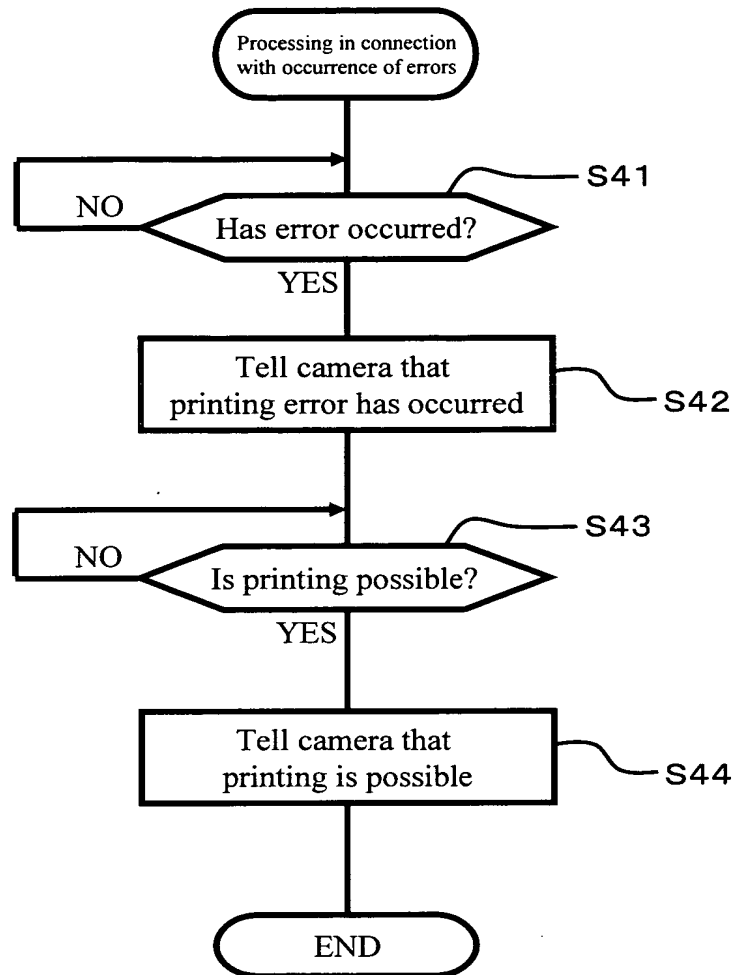


FIG. 9


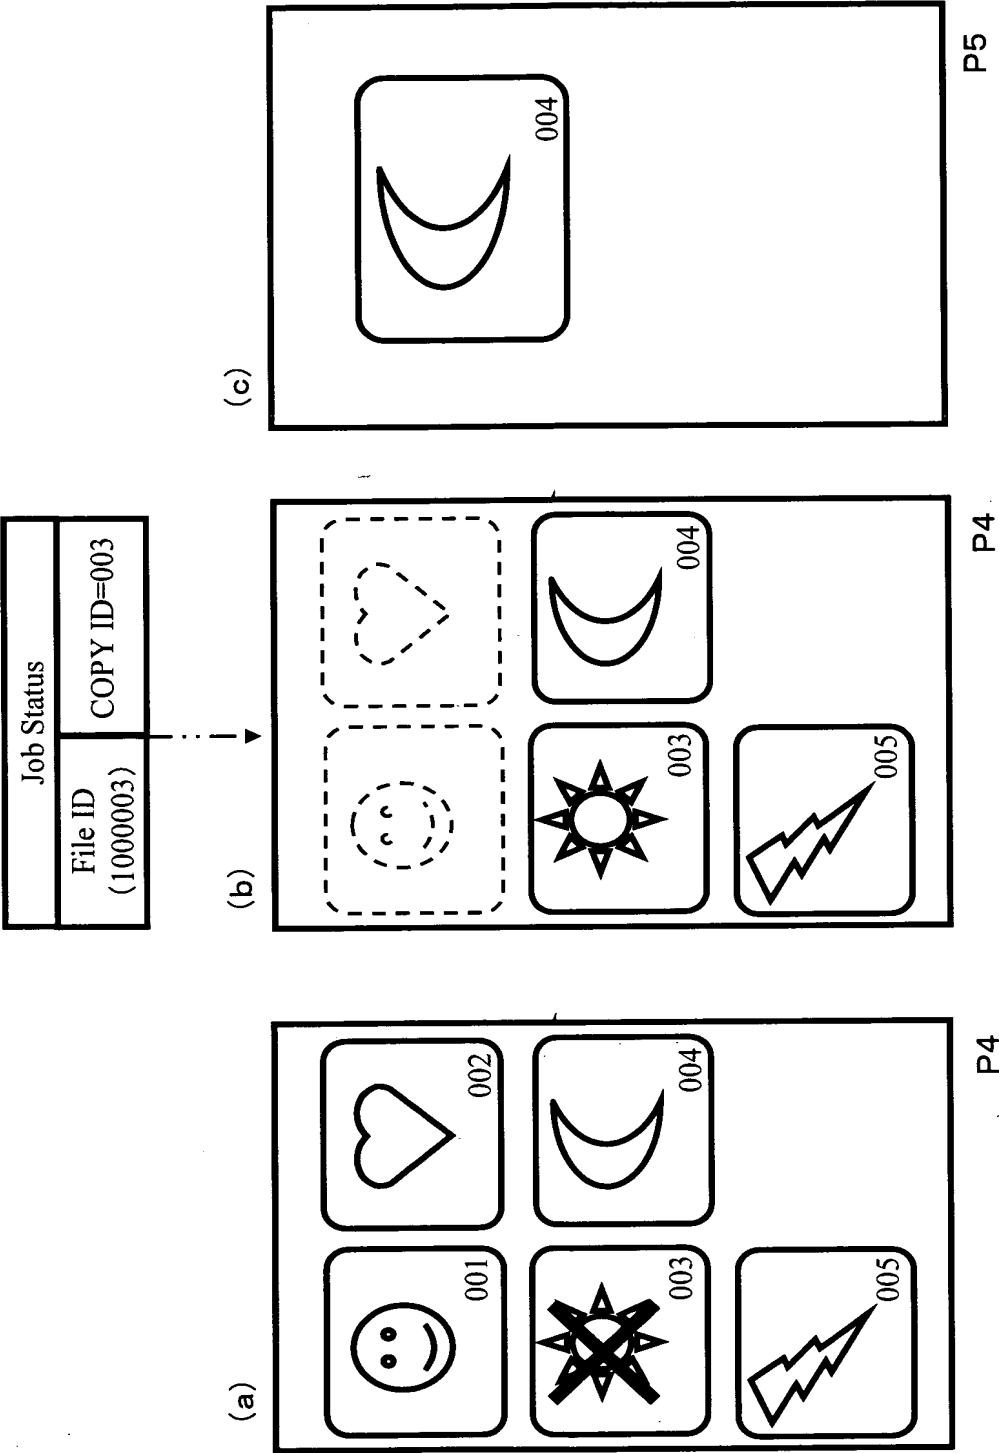


FIG. 10

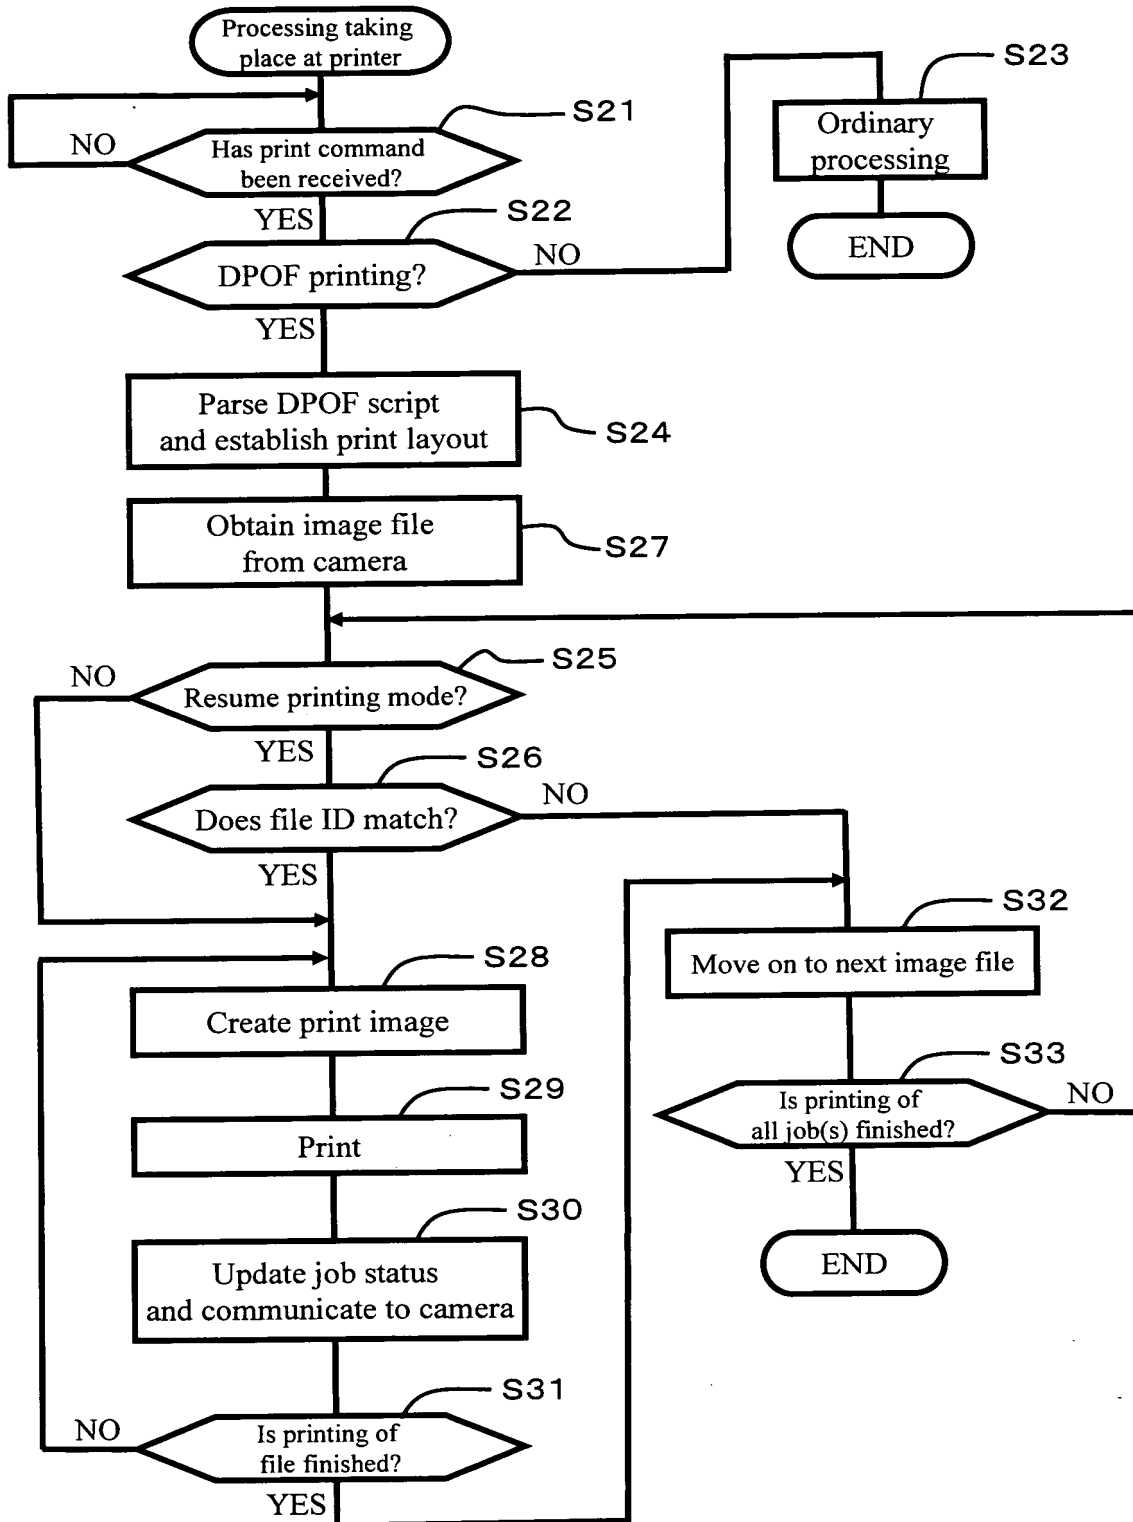

10/521564

FIG. 11

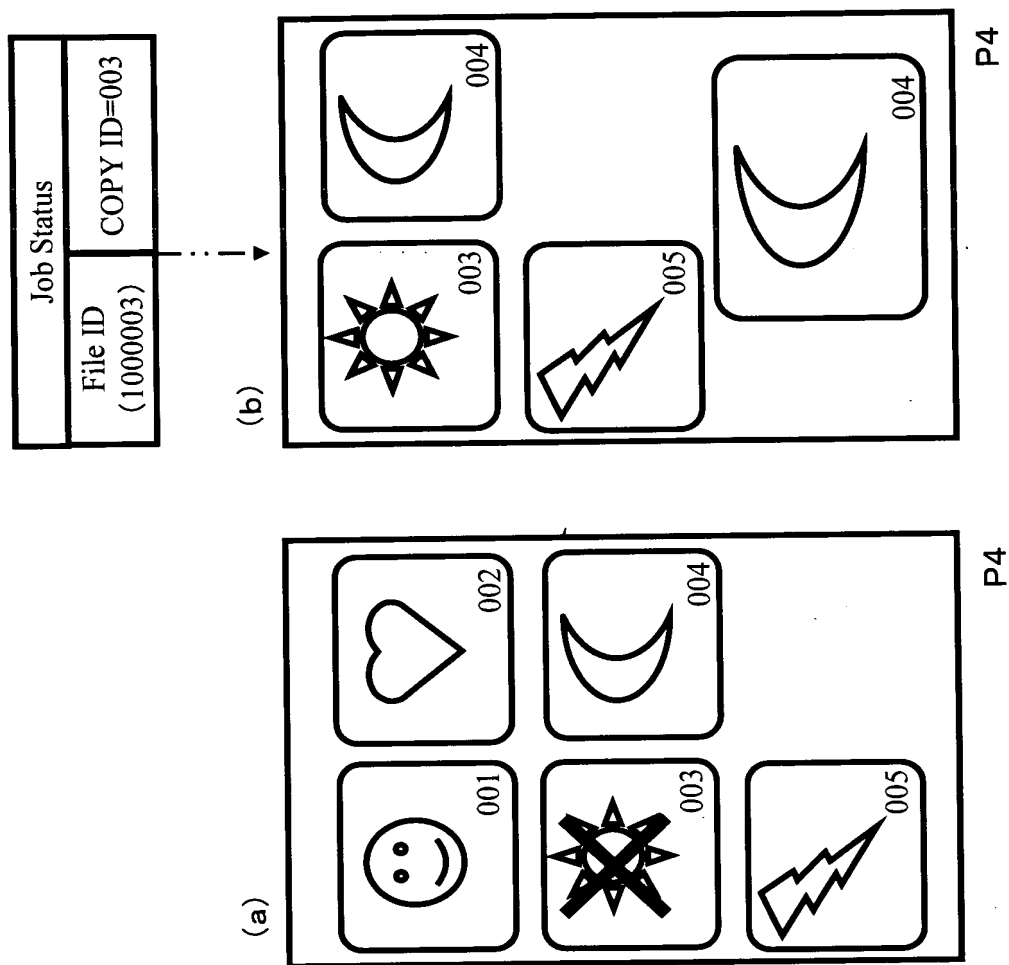


FIG. 12

```
[HDR]                                ; Header section
GEN REV=01.10                        ; DPOF version
GEN CRT="CP-920Z"-01.00              ; Model
GEN DTM=2002:06:20:14:30:00          ; File creation date

[JOB]                                ; Job description section
PRT PID=001                          ; Print product ID
PRT TYP=STD                          ; Print type
PRT QTY=002                          ; Number of prints
IMG FMT=EXIF2-J                      ; File format
<IMG SRC=" ../DCIM/100EPSON/EPSON0003.JPG"> ; File path

[JOB]
PRT PID=002
PRT TYP=IDX                          ; Index printing
PRT QTY=003
IMG FMT=EXIF2-J                      ; Exchangeable Image File Format
IMG SRC=" ../DCIM/100EPSON/EPSON0001.JPG" ; For index printing,
IMG SRC=" ../DCIM/100EPSON/EPSON0002.JPG" ; do not use <>
IMG SRC=" ../DCIM/100EPSON/EPSON0003.JPG" ; with path description.
IMG SRC=" ../DCIM/100EPSON/EPSON0004.JPG"
IMG SRC=" ../DCIM/100EPSON/EPSON0005.JPG"

[JOB]
PRT PID=003
PRT TYP=STD
PRT QTY=001
IMG FMT=EXIF2-J
<IMG SRC=" ../DCIM/100EPSON/EPSON0004.JPG"> ; For standard printing,
                                           ; use <> with path.

[RE-PRINT]
PRT PID =002                        ; "000" for ordinary printing
FILE ID =1000003                    ; "0000000" for ordinary printing
PRT QTY=003                         ; "000" for ordinary printing
```